

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



PCT



(43) International Publication Date
30 March 2006 (30.03.2006)

(10) International Publication Number
WO 2006/033562 AI

(51) International Patent Classification⁷: D06F 39/08,
A47L 15/42

(21) International Application Number:
PCT/KR2005/003166

(22) International Filing Date:
23 September 2005 (23.09.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
10-2004-0076747
24 September 2004 (24.09.2004) KR

(71) Applicant (for all designated States except US): LG
ELECTRONICS, INC. [KR/KR]; 20, Yoido-Dong,
Youngdungpo-ku, Seoul 105-875 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BANG, Jong Chul

[KR/KR]; 102-601, Hyundai lcha Apt., Banrim-dong,
Changwon-si, Gyeongsangnam-do 101-113 (KR).


(74) Agent: HAW, Yong Noke; 8th Fl. Songchon Bldg.,
642-15, Yeoksam-dong, kangnam-ku, Seoul 135-080
(KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: WASHING DEVICE AND AQUA STOPPING DEVICE FOR THE SAME

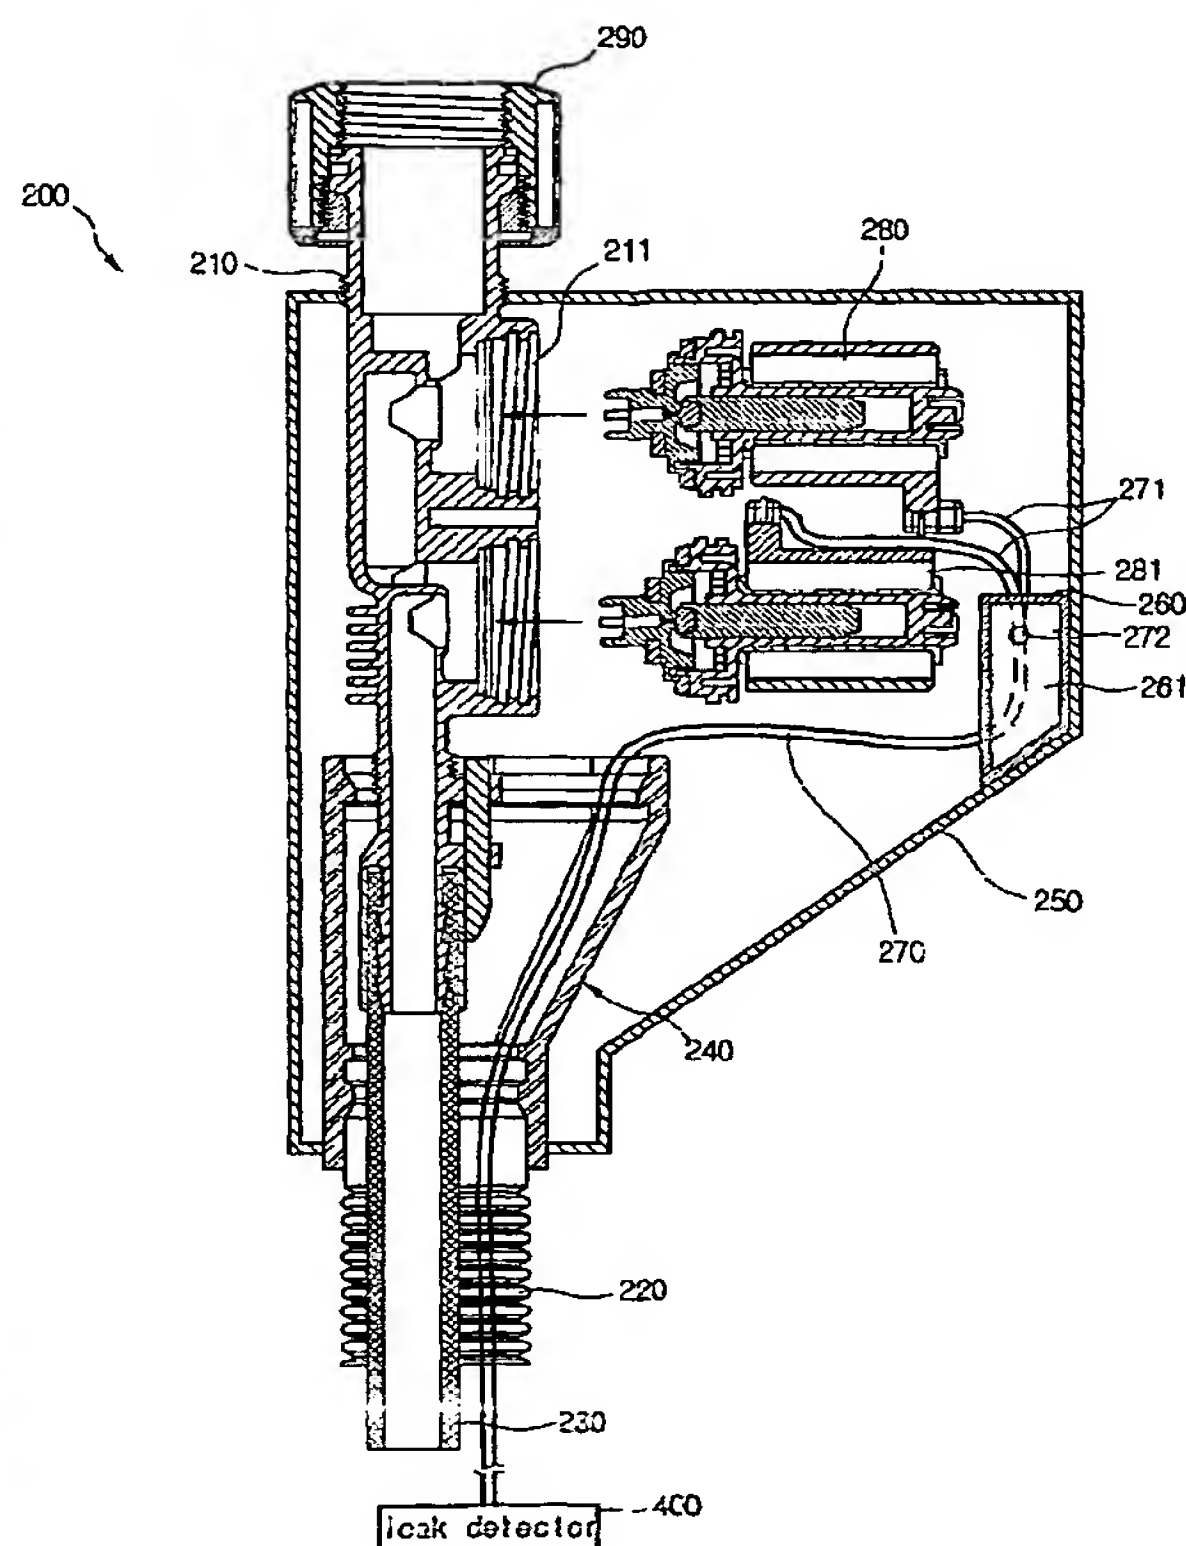

(57) Abstract: An aqua stopping device (200) for washing
device (100) is provided. The aqua stopping device (200) in-
cludes a valve body (210), at least one valve (280), a signal
wire (271), a connecting wire (271), a connecting portion
(272), an inner case (260), an outer case (250). The valve
body (210) has a passage formed within. The at least one
valve (280) opens and closes the passage. The signal wire
(271) is connected to a terminal of the valve (280). The
connecting wire (271) is connected to the signal wire (271).
The connecting portion (272) is the portion where the signal
wire (271) and the connecting wire (271) connect. The in-
ner case (260) encloses at least the connecting portion. The
outer case (250) is provided at the exterior of the inner case
(260). The inventive aqua stopping device (200) reduces
manufacturing cost and time, and also the weight of the de-
vice to make handling thereof easier.

WO 2006/033562 AI



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

Published:

— *with international search report*